

MISC. MASKING

ULTRABAKE™ SHEETING 600°F (315°C)




We die-cut our sheeting to your specific requirements

- Recommended for Powder Coating, E-Coating, Plating and Anodizing
- Sheeting can be used for gaskets, pads, strips washers and seals
- Reusable and very durable

Part Number	Length/Width		SIZE		
	Imperial (in)	Metric (mm)	Thickness		
			Imperial (in)	Metric (mm)	
US031-36	36 square inch	914 mm square	0.031	1/32	0.79
US062-36	36 square inch	914 mm square	0.062	1/16	1.57
US093-36	36 square inch	914 mm square	0.093	3/32	2.36
US125-36	36 square inch	914 mm square	0.125	1/8	3.18
US187-36	36 square inch	914 mm square	0.187	3/16	4.75
US250-36	36 square inch	914 mm square	0.250	1/4	6.35
US375-36	36 square inch	914 mm square	0.375	3/8	9.53
US500-36	36 square inch	914 mm square	0.500	1/2	12.70

ULTRABAKE™ MULTI-DIAMETER TUBING 600°F (315°C)

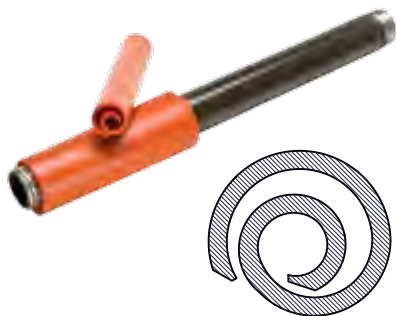

Part Number	Diameter Minimum		Diameter Maximum		Coil Length	
	Imperial (in)	Metric (mm)	Imperial (in)	Metric (mm)	Feet	Meters
MDT0350-0650	0.350	8.89	0.650	16.51	100	30
MDT0650-2250	0.650	16.51	2.250	57.15	100	15

ULTRABAKE™ CORD 600°F (315°C)



- Recommended for Powder Coating, E-Coating, Plating and Anodizing
- Ideal for slots and through holes
- Flexible
- Cut to size
- Reusable

Part Number	Diameter		Coil Length	
	Imperial (in)	Metric (mm)	Feet	Meters
UC0070	0.070	1.78	100	30
UC0093	0.093	2.36	100	30
UC0103	0.103	2.62	100	30
UC0125	0.125	3.18	100	30
UC0139	0.139	3.53	100	30
UC0156	0.156	3.96	100	30
UC0187	0.187	4.75	100	30
UC0210	0.210	5.33	100	30
UC0250	0.250	6.35	100	30
UC0275	0.275	6.99	100	30
UC0312	0.312	7.92	100	30
UC0375	0.375	9.53	50	15
UC0437	0.437	11.10	50	15
UC0500	0.500	12.70	50	15
UC0562	0.562	14.27	50	15